

EBONY

PORCELAIN TILES



Deco Home

Building Material



EBONY



GRIS



HAYA



MIEL



MIEL



MIEL

EBONY

GEOWOODS

PORCELAIN TILES



Sizes / Formatos



Ebony GRIS
60x120/24"x48"
Natural Rectified



Deco Home

Building Material





EBONY GRIS


EBONY

GEOWOODS

PORCELAIN TILES



Sizes / Formatos

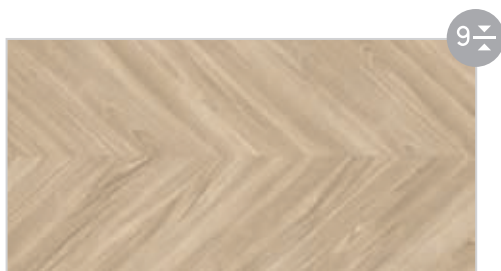

Ebony HAYA
60x120/24"x48"
Natural Rectified



Building Material





EBONY HAYA


EBONY

GEOWOODS

PORCELAIN TILES



Sizes / Formatos

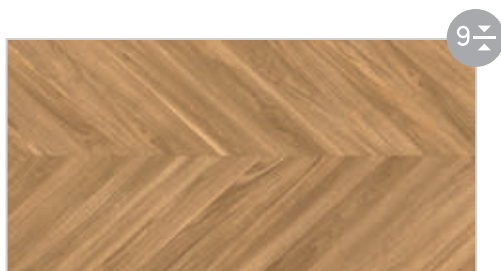

Ebony MIEL
60x120/24"x48"
Natural Rectified



Building Material





EBONY MIEL

TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS



Porcelain tile
Porcelánico



Fireproof
Ignífugo



Responsible
Responsable



Natural Rectified
Natural Rectific



Durable and resistant
Duradero y resistent



High Shade Variation
Destonificado



Matt surface
Superficie Mate



UV Resistant
Resistente a los rayos U



Hygienic and Anti-Allergenic
Higiénico y antialérgico



Easy maintenance
Fácil mantenimiento

STANDARD NORMES NORMAS DE ENSAYO	ISO 10545-2	ISO 10545-3	ISO 10545-4	ISO 10545-6	ISO 10545-9	ISO 10545-12	ISO 10545-13	ISO 10545-14	DIN 51130 DIN 51097 UNE-ENV 12633 ASTM C 1028
VALUE REQUIRED BY EN 14411 STANDARD VALORES PRESCRITOS NORMA EN 14411		< 0,5%	> 35 N/mm ² > 1300 N	Máx.175 mm ³	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	R Rating Clase
AVERAGE VALUE VALOR MEDIO	Conforms to Standard Cumple la norma	0,1%	35-45 N/mm ² 1800-2500 N	110-130 mm ³	Resists Resiste	Resists Resiste	Conforms to Standard Cumple la norma	Conforms to Standard Cumple la norma	According to models Según modelos

Group BIa (gl) Water Absorption <0.5% / Grupo BIa (gl) Absorción de Agua <0.5%



Dimensional Features
Características dimensionales



Water absorption
Absorción de agua



Modulus of rupture
Resistencia a la flexión



Resistance to deep abrasion (mm³)
Resistencia a la abrasión profunda (mm³)



Thermal shock resistance
Resistencia al choque térmico



Frost resistance
Resistencia a la helada



Chemical resistance
Resistencia química
Acids and bases
Ácidos y bases

Cleaning products and pool
reactive agents
Productos de limpieza y
reactivos de piscinas



Resistance to stains
Resistencia a las manchas




Slip Resistance
Resistencia al deslizamiento

SPECIAL PIECES / PIEZAS ESPECIALES


Special angle / Ángulo gradone recto



Special step / Peldaño gradone recto



Step / Peldaño romo

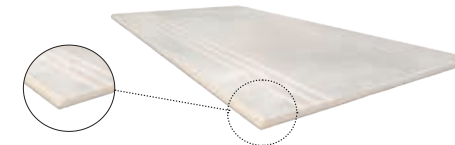

PACKING LIST

	Pcs/Box Pz/Caja	Sqm/Box m ² /Caja	Boxes/Pallet Cajas/Pale	Sqm/Pallet m ² /Palet	Kg/Box Kg/Caja	Kg/Pallet Kg/Palet
60x120	2	1,44	32	46,08	34,00	1.113
60,8x60,8	4	1,48	30	44,40	31,00	950
60x60	4	1,44	30	43,20	30,00	920

GEOTILES reserves the right to modify the packing of any product reference.

GEOTILES se reserva el derecho a modificar el packing (en relación al espesor de la pieza).

Geotiles, S.L.U. operates a policy of continuous development and reserves the right to make changes to its products, colours, engineering specifications, packaging codes without prior notice. Geotiles has taken every effort to ensure that the information contained in the catalogue is correct at the time of publication. Due to the limitations of the printing process, the colours reproduced may vary slightly from the original product.

Geotiles, S.L.U. aplica una política de continuo desarrollo de sus productos y se reserva el derecho a realizar cambios en los productos, colores, especificaciones técnicas y códigos sin previo aviso. Geotiles ha realizado un esfuerzo considerable para que toda la información sea adecuada en el momento de la publicación del catálogo. A causa de las limitaciones del proceso de impresión los colores reproducidos pueden sufrir ligeras variaciones con respecto al producto original.